



# ACE2

- 
- 
- 
- 
- 
- 
- 
- 

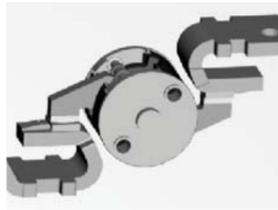


# ACE2

16-1250  
 $U_i$  750 ,  $U_{imp}$  8

36, 50 70      415/440 V

$I_{cs} = I_{cu}$

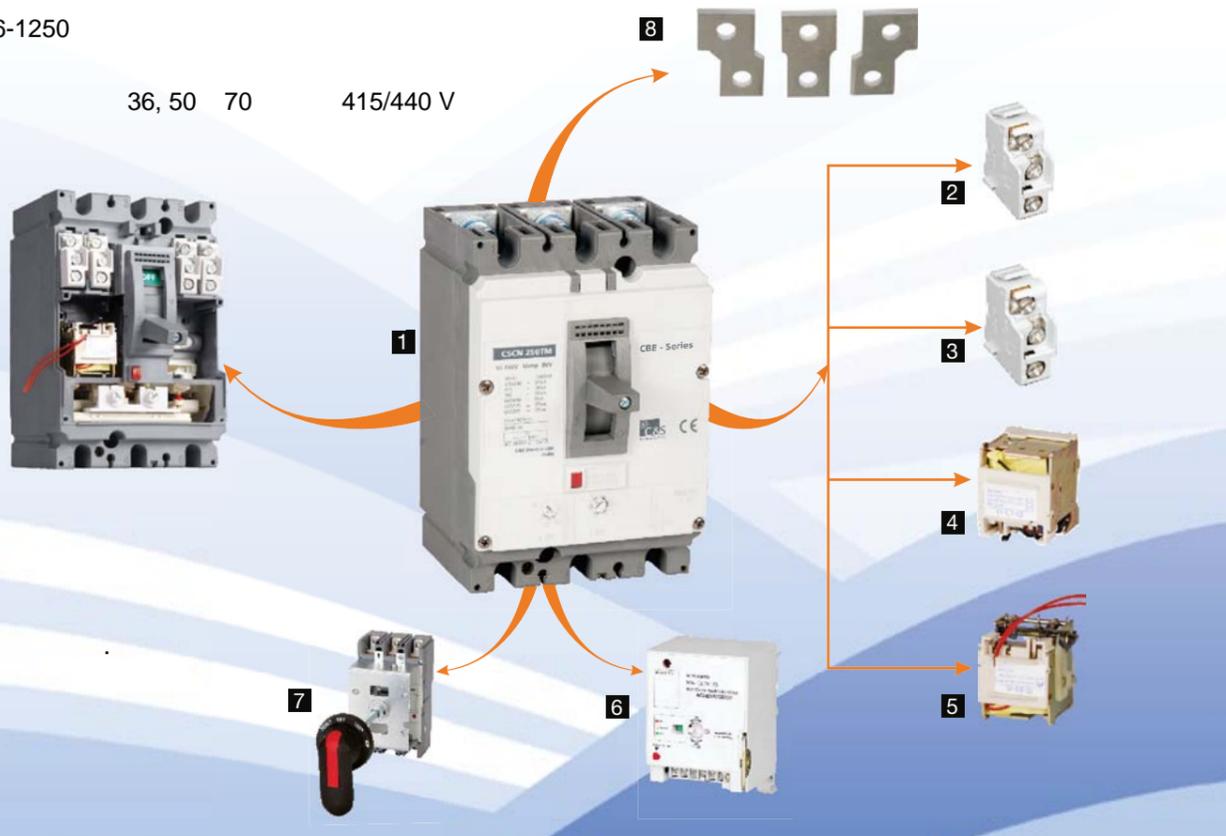

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8

	CSCN125TM		CSCN250TM		
	1	2	3	4	
IEC 60947-2					
(A)	16, 20, 25, 32, 40, 50, 63, 80, 100, 125		160, 180, 200, 250		
( ) $U_i$	750		750		
( ) $U_{imp}$	8		8		
( ) $U_e$	AC 50/60Hz	690		690	
	DC	500		500	
( RMS) $I_{cu}$	AC 415V/440V	36	36	36	36
	DC 250V (1P)	25	25	25	25
	DC 500V (2P)	25	25	25	25
$I_{cs} = (\% I_{cu})$	100		100		
	A		A		
( - )	20000		20000		
( )	20000		20000		
	-		-		
( ) x x	90x140x79	120x140x79	105x157x88	140x157x88	
( )	1.2	1.6	2.1	2.8	

	CSCN125TM		CSCN250TM	
	1	2	3	4
(A) 40 ° C	16, 20, 25, 32, 40, 50, 63, 80, 100, 125		160, 180, 200, 250	
(A)	0,8; 0,9; 1; I		0,8; 0,9; 1; I	
( )	10 $I_n$ ( ) 12 $I_n$ ( )		5 ~ 10 $I_n$ ( )	12 $I_n$ ( )

